



sunlighten™
empowering wellness™



Community Solocarbon® Far Infrared Sauna

Sunlighten's patented heating technology is now available in industrial-grade with ADA-compliant regulations. Solocarbon® heaters provide the highest quantity and quality of far infrared heat available, are ultra low EMF for ultimate safety and are clinically tested to lower blood pressure, aid in detoxification and weight loss.

ADA-compliant, industrial-grade durability:

- 100% ADA-compliant with 36" door and 60"x60" turning space
- 1:12 ramp with safety rails and brushed finish to prevent slipping
- 3 different bench variations for extra turning space
- Additional bracing support under bench and floor
- Non-toxic, waterproof sealant protects from water and sweat
- 16 gauge, industrial strength electrical wiring
- Patented Magne-Seal assembly provides double reinforcement
- Made from premium eucalyptus wood

SPECIFICATIONS

Exterior

85.6" W x 70.6" D x 76.6" H* / 36" door width

*Optional Hidden Feet add 2 inches.

Ramp - 36" x 43" (1:12 slope)

Interior

79.6" W x 64.9" D x 71.5" H / 21.8" bench depth

15 Solocarbon heaters

Electrical


240v; 3080 watts, 20a (**20A outlet**)

DEDICATED 240V 20A CIRCUIT AND OUTLET REQUIRED.
SEE IMAGE FOR REFERENCE



9' cord exits from back left corner of the ceil panel.

ELECTRICALLY CERTIFIED

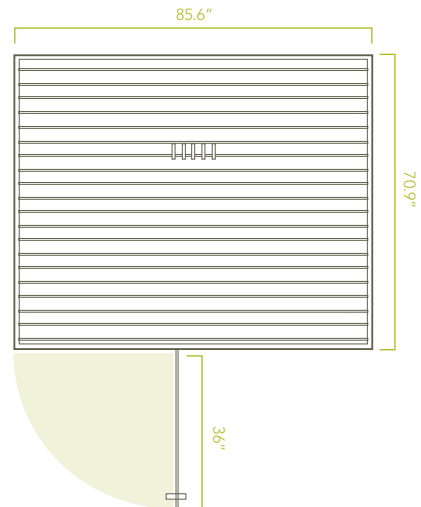



ADA Solocarbon® Infrared Sauna Panels


The ADA sauna is our largest sauna model. For seamless craftsmanship, each wall consists of one large wooden panel:

- Roof & Floor Panels
83.4"x72.1"x2.75" thick (see diagram)
- Back & Front Panels
80.5"x65.4"x2.75" thick (see diagram)
- Side Panels 69.5"x65.4"x2.75" thick

Fitting into your home:

Because of the large panel size, it is important to ensure there is enough space through the doors and pathways to the sauna's location in your home. Standard doors in the US are 30" to 36" wide, and 6' to 8' tall. Please measure any doorway or hallway needed prior to purchase.

Back Wall

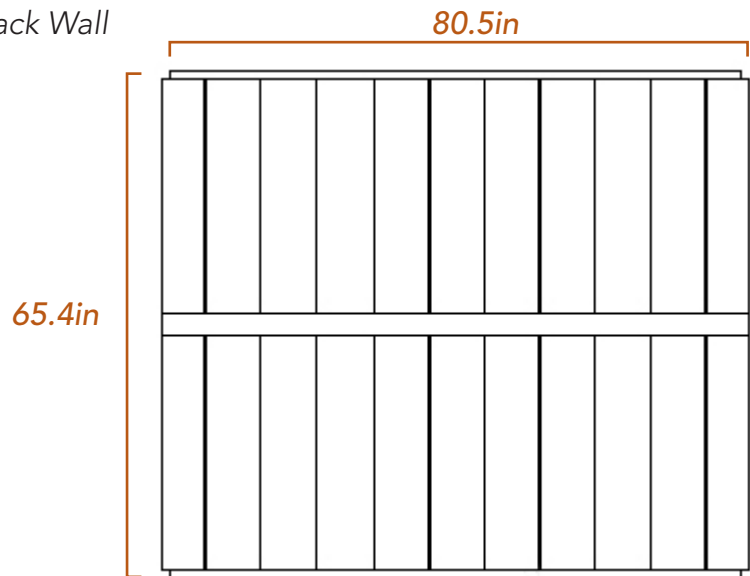

Roof

